

Swivel/gripper units HGDS-B

FESTO



Swivel/gripper units HGDS-B


Key features

FESTO

At a glance

- Combination of parallel gripper with T-slot guide and swivel module on the basis of swivel module DSM
- Infinitely adjustable swivel angle (max. 210°)
- Supply ports and position sensing outside the swivel range
- High performance (torque, mass moment of inertia)
- All connections accessible from one side
- Compact design and low weight


The technology in detail

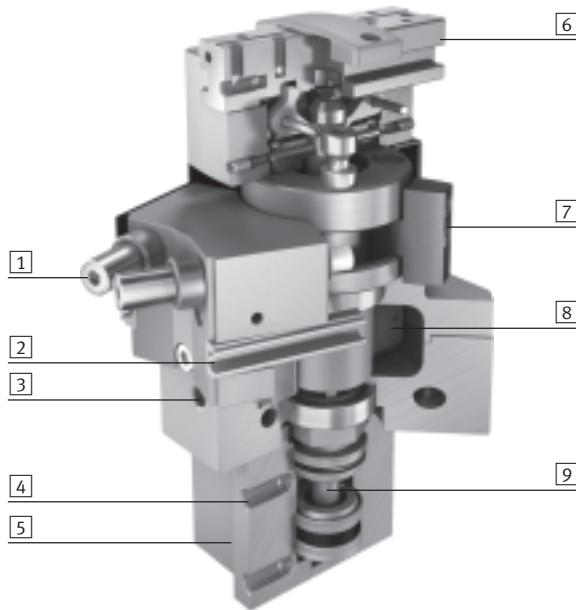


- | | |
|---|---|
| <p>1 Three types of cushioning for swivel motion:</p> <ul style="list-style-type: none"> – Flexible cushioning elements (P) – Adjustable flexible cushioning components with metal fixed stop (P1) – Shock absorbers with metal fixed stop (YSRT) <p>2 Slot for proximity sensor SME/SMT-10 for sensing the swivel position</p> <p>3 Supply port for swivelling function</p> <p>4 Supply port for gripping function</p> <p>5 Slot for proximity sensor SME/SMT-10 for sensing the gripping position</p> | <p>6 Gripper jaw with T-slot guide</p> <p>7 Adjustable stop cams for adjusting the swivel motion</p> <p>8 Rotary vane</p> <p>9 Piston rod for gripping motion</p> |
|---|---|

Mounting options

Direct mounting

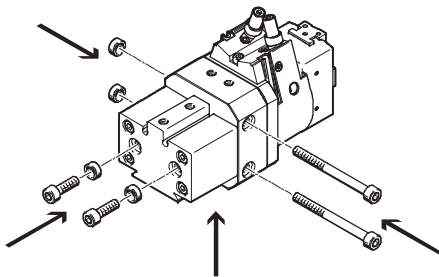


Dovetail connection




The swivel/gripper unit can be mounted on four sides.

Note


Swivel/gripper units are not suitable for the following or similar applications:



- Machining
- Aggressive media



- Grinding dust




- Welding spatter

Swivel/gripper units HGDS-B


Peripherals overview and type codes

FESTO

Peripherals overview

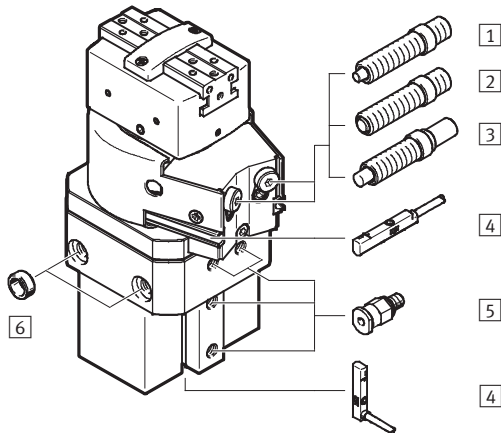

System product for handling and assembly technology

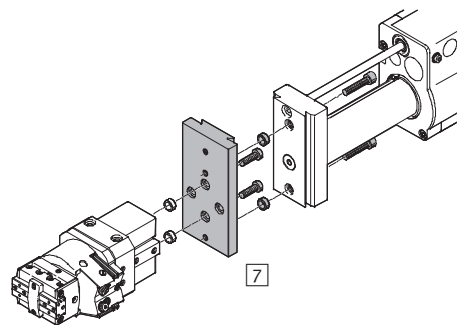

Accessories			
Type	Brief description		→ Page/Internet
1 Cushioning P	Flexible cushioning components at both ends		14
2 Cushioning P1	Adjustable flexible cushioning components at both ends, with metal fixed stop		14
3 Cushioning YSRT	Self-adjusting shock absorbers at both ends, with metal fixed stop		14
4 Proximity sensor SME/SMT-10	For sensing the gripping and swivelling position		16
5 Push-in fitting QS	For connecting compressed air tubing with standard O.D.		quick star
6 Centring sleeve ZBH	For centring the gripper when mounting (2 included in the scope of delivery)		16
7 Adapter kit HMSV	Drive/gripper connections		15

Type codes

		HGDS	–	PP	–	16	–	YSRT	–	A	–	B
Type												
HGDS	Swivel/gripper unit											
Gripper function												
PP	Parallel gripper											
Size												
Cushioning												
P	Flexible cushioning components at both ends											
P1	Adjustable flexible cushioning components at both ends											
YSRT	Self-adjusting shock absorbers at both ends											
Position sensing												
A	Via proximity sensor											
Generation												
B	B series											


Swivel/gripper units HGDS-B

Technical data

FESTO

Function
Swivelling/gripping

www.festo.com/en/
[Spare_parts_service](#)



-N- Size
12, 16, 20 mm
-T- Stroke
5, 9, 14 mm



General technical data			
Size	12	16	20
Design	Parallel gripper		
	Swivel module		
	Gripper module		
Mode of operation	Double-acting		
Pneumatic connection	M5		
Type of mounting	Via female thread and centring sleeve		
	Via through-hole and centring sleeve		
	Via dovetail slot		
Cushioning			
P cushioning	Flexible cushioning at both ends components		
P1 cushioning	Adjustable flexible cushioning components at both ends		
YSRT cushioning	Self-adjusting shock absorbers at both ends		
Mounting position	Any		
Relubrication intervals of guide	10 million switching cycles		
Product weight [g]	505	730	1,260
Technical data – swivelling	→ 5		
Technical data – gripping	→ 8		

Operating and environmental conditions	
Operating pressure [bar]	3 ... 8
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)
Ambient temperature ¹⁾ [°C]	+5 ... +60
Corrosion resistance class CRC ²⁾	2


1) Note operating range of proximity sensors

2) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Materials

Sectional view

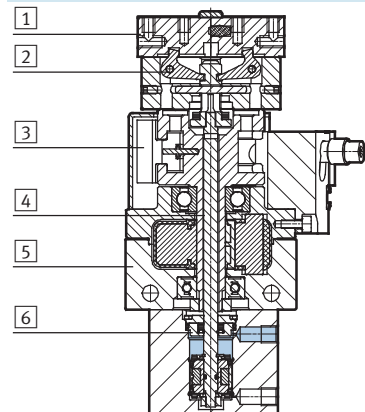

Swivel/gripper unit		
1	Gripper jaw	Stainless steel
2	Lever	Hardened steel
3	Stop	Stainless steel
4	Piston rod	Stainless steel
5	Housing	Wrought aluminium alloy
6	Piston	Nitrile rubber, polyurethane
–	Rubber buffer	Nitrile rubber

Swivel/gripper units HGDS-B

Technical data


Technical data – Swivelling

Size		12	16	20
Swivel angle	[°]	0 ... 210		
Theoretical torque ¹⁾	[Nm]	0.85	1.25	2.5
Repetition accuracy ¹⁾				
P cushioning	[°]	< 0.2		
P1 cushioning	[°]	< 0.02		
YSRT cushioning	[°]	< 0.02		
Max. swivel frequency ¹⁾				
P cushioning	[Hz]	2		
P1 cushioning	[Hz]	2		
YSRT cushioning	[Hz]	1.5		
Position sensing		Via proximity sensor		


1) At an operating pressure of 6 bar

Mass moments of inertia J at 6 bar as a function of swivel time t and swivel angle


HGDS-PP-12-P-A-B

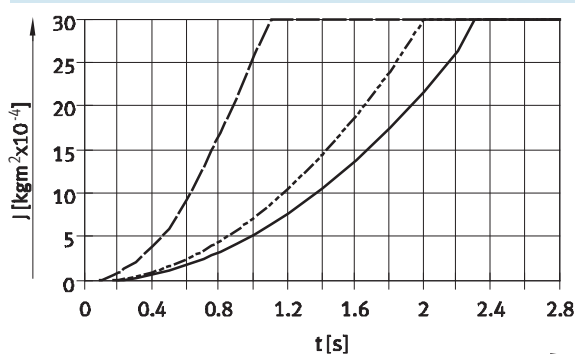


HGDS-PP-12-P1-A-B

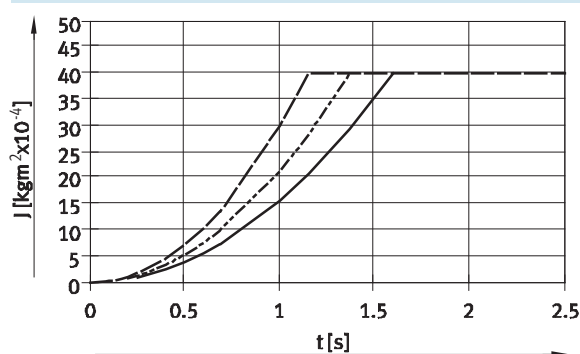


HGDS-PP-16-P-A-B

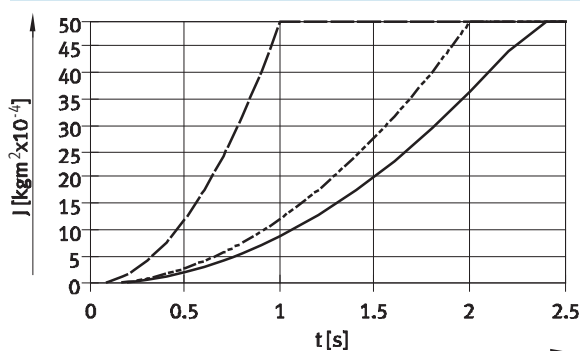


HGDS-PP-16-P1-A-B

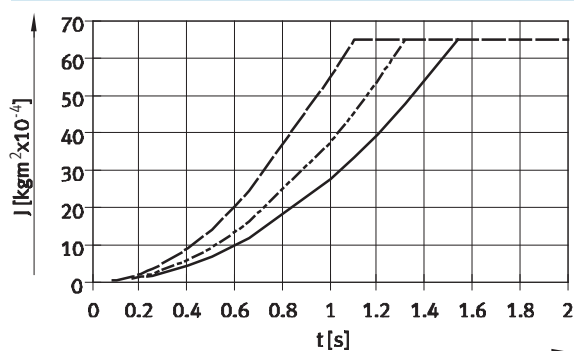

HGDS-PP-20-P-A-B

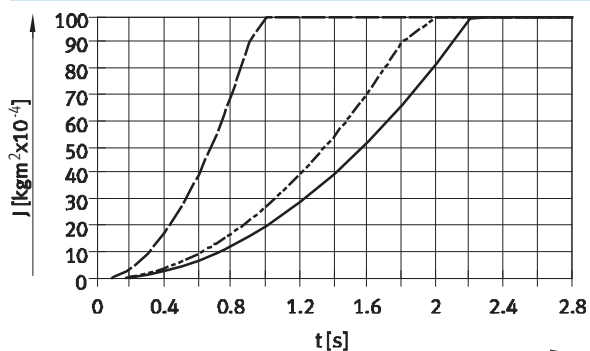

HGDS-PP-20-P1-A-B

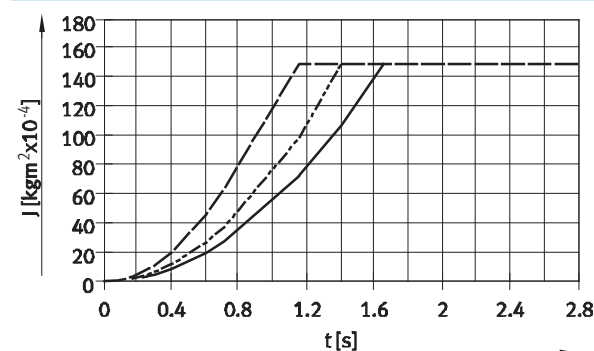

— Swivel angle 210° - · - Swivel angle 90°
 - - - Swivel angle 180°


Swivel/gripper units HGDS-B

Technical data


FESTO

Mass moments of inertia J at 6 bar as a function of swivel time t and swivel angle


HGDS-PP-12-YSRT-A-B

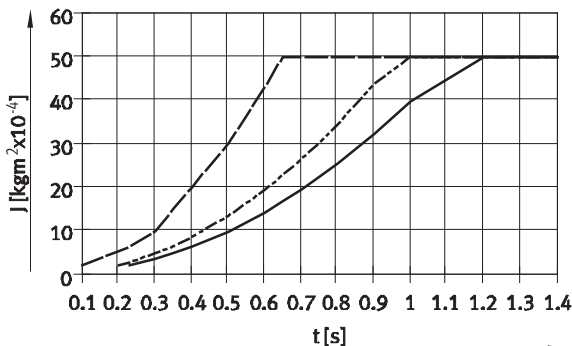

HGDS-PP-16-YSRT-A-B

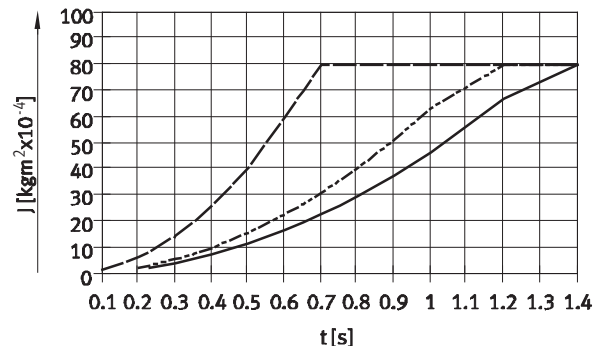

HGDS-PP-20-YSRT-A-B

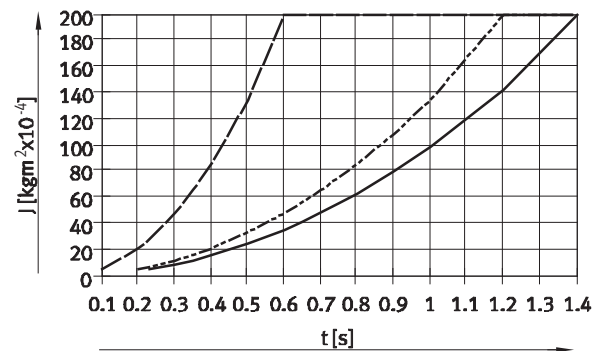

— Swivel angle 210°
 - - - Swivel angle 180°
 - · - Swivel angle 90°

Dependency between operating pressure and swivel time

Reducing the operating pressure reduces the gripping force. To ensure that the gripper's jaws do not open during swivelling, the swivel time must be increased by 15% per bar of operating pressure (same mass moment of inertia).

Example:

Given:

HGDS-PP-16-YSRT-A-B

Operating pressure 6 bar

Swivel angle 90°

$J = 40 \text{ kgm}^2 \times 10^{-4}$

To be calculated:

Swivel time at an operating pressure of 4 bar

Swivel time at 6 bar = 0.5 s, see graph opposite


Swivel time at 4 bar:

$t = 0.5 + 2 \times 15\% = 0.65 \text{ s}$

Cushioning time of the shock absorber = 0.1 s

This yields a total swivel time of

$t_{\text{tot.}} = 0.65 \text{ s} + 0.1 \text{ s} = 0.75 \text{ s}$

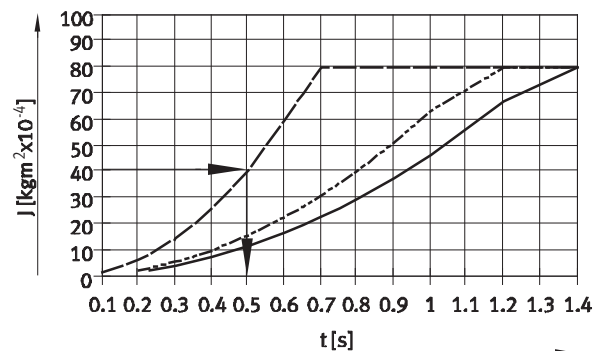

Swivel/gripper units HGDS-B

Technical data

Precision adjustment of the swivel angle


The swivel angle can be roughly adjusted by moving the cam stops
→ 2.

The procedure for precision adjustment is the same for all cushioning variants (P, P1 and YSRT).


The swivel angle can be precisely adjusted by unscrewing or screwing in the cushioning component.

Swivelling to a metal stop enables high repetition accuracy.

- 1) Loosen the locking screw underneath the cushioning component.



- 2) Adjust the cushioning component as required. Note the adjustment range.



Size		12	16	20
Precision adjustment range				
P cushioning	[°]	−6		
P1 cushioning	[°]	−6		
YSRT cushioning	[°]	−2.5		
Adjustment range of the cushioning component				
P cushioning	[mm]	2	2.6	2.8
P1 cushioning	[mm]	2	2.6	2.8
YSRT cushioning	[mm]	1	1.3	1.4

Swivel/gripper units HGDS-B

Technical data

FESTO

Technical data – Gripping



Size	12	16	20
Gripper function	Parallel		
Number of gripper jaws	2		
Max. applied load per external gripper finger ¹⁾ [N]	0.3	0.5	1.0
Stroke per gripper jaw [mm]	2.5	4.5	7
Max. gripper jaw backlash [mm]	0.02		
Max. gripper jaw angular play [°]	0.1		
Repetition accuracy [mm]	±0.01		±0.015
Max. operating frequency [Hz]	4		
Position sensing	Via proximity sensor		

1) Valid for unthrottled operation

Opening and closing times [ms] at 6 bar

Without external gripper fingers

With external gripper fingers

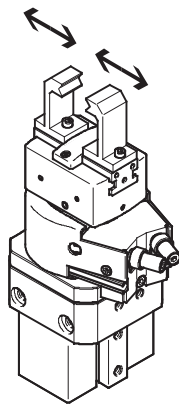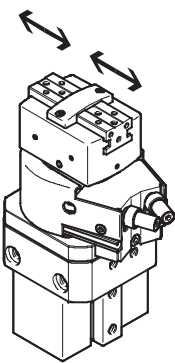

The indicated opening and closing times [ms] have been measured at room temperature and 6 bar operating pressure with vertically mounted swivel/gripper unit without additional

gripper fingers. The grippers must be throttled for greater applied loads. Opening and closing times must then be adjusted accordingly.

With external gripper fingers as a function of applied load

Size		12	16	20
Max. applied load		0.3 N	0.5 N	1.0 N
Unthrottled	Opening	40	40	60
	Closing	60	60	70


With external gripper fingers as a function of applied load

Size	12		16		20		
Applied load	1.0 N	2.0 N	1.0 N	2.0 N	1.0 N	2.0 N	
Throttled	Closing	100	150	100	200	100	250

Swivel/gripper units HGDS-B

Technical data

Static characteristic load values per gripper jaw

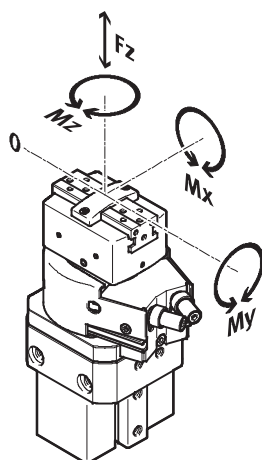

The indicated permissible forces and torques apply to a single gripper jaw. The indicated values include the lever arm, additional applied loads caused by the workpiece or external gripper fingers, as well as forces which occur during movement.

The zero coordinate line (gripper finger guide) must be taken into consideration for the calculation of torques.

Size	12	16	20
Max. permissible force F_z [N]	90	150	250
Max. permissible torque M_x [Nm]	6	11	22
Max. permissible torque M_y [Nm]	6	11	22
Max. permissible torque M_z [Nm]	6	11	22

Gripping force [N] at 6 bar with a lever arm of 25 mm

Size	12	16	20
Gripping force per gripper jaw			
Opening	42	58	96
Closing	37	51	84
Total gripping force			
Opening	84	116	192
Closing	74	102	168


Swivel/gripper units HGDS-B

Technical data

FESTO

Gripping force F_H per gripper jaw as a function of operating pressure p


Gripping forces as a function of operating pressure and lever arm can be determined for the various sizes using the following graphs.




— 3 bar
- - - 6 bar
- · - 8 bar

HGDS-12

Opening

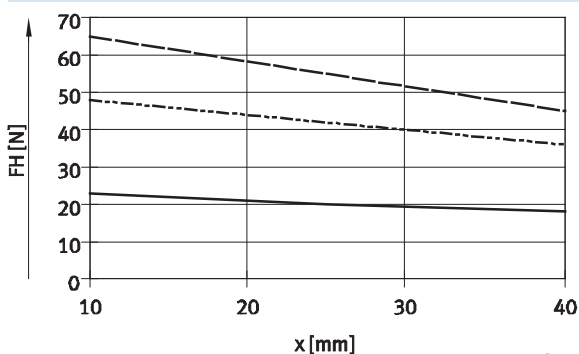


Closing

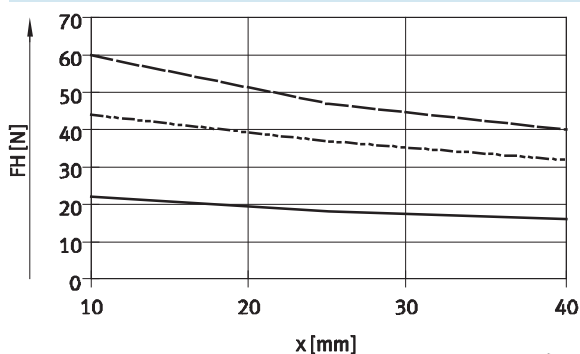


HGDS-16

Opening

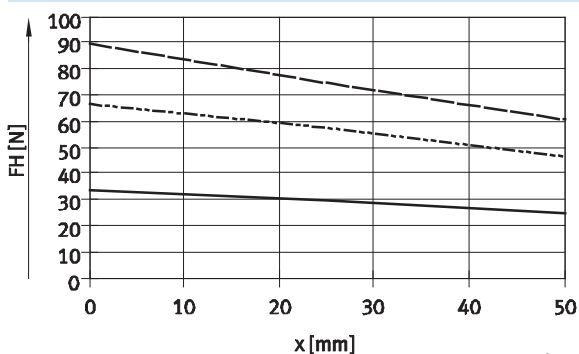


Closing

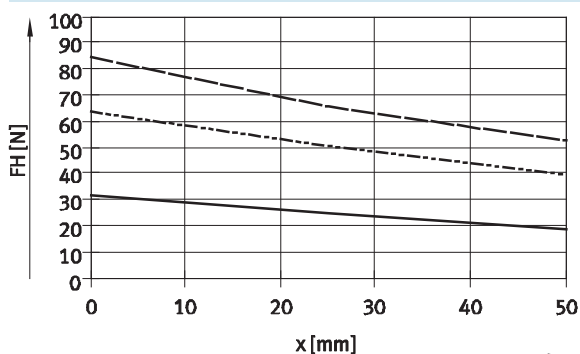


HGDS-20

Opening

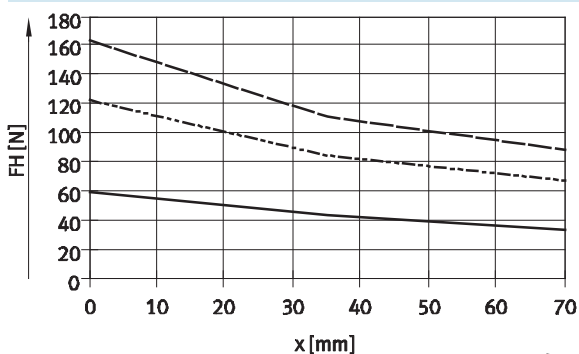

Closing

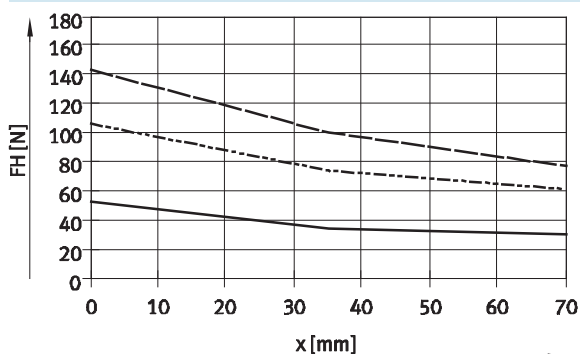


Swivel/gripper units HGDS-B

Technical data

Gripping force F_H per gripper jaw at 6 bar as a function of lever arm x and eccentricity a and b

The following formula must be used to calculate the lever arm x with eccentric gripping:

$$x = \sqrt{a^2 + b^2}$$

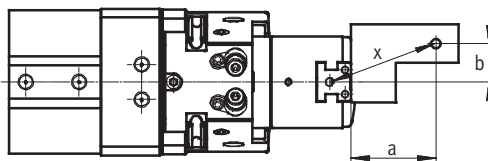

The gripping force F_H can be read from the graphs (→ from page 10) using the calculated value x .

Calculation example

Given:

Distance $a = 25$ mm

Distance $b = 20$ mm

To be calculated:

The gripping force at 6 bar,
with an HGDS-16,
used as an external gripper


Procedure:

Calculating the lever arm x

$$x = \sqrt{25^2 + 20^2}$$

$$x = 32$$
 mm

The graph (→ 10) gives a value of F_H
= 47 N for the gripping force.

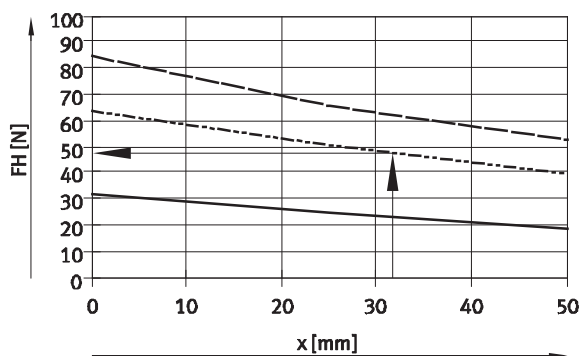


Swivel/gripper units HGDS-B

Technical data


FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

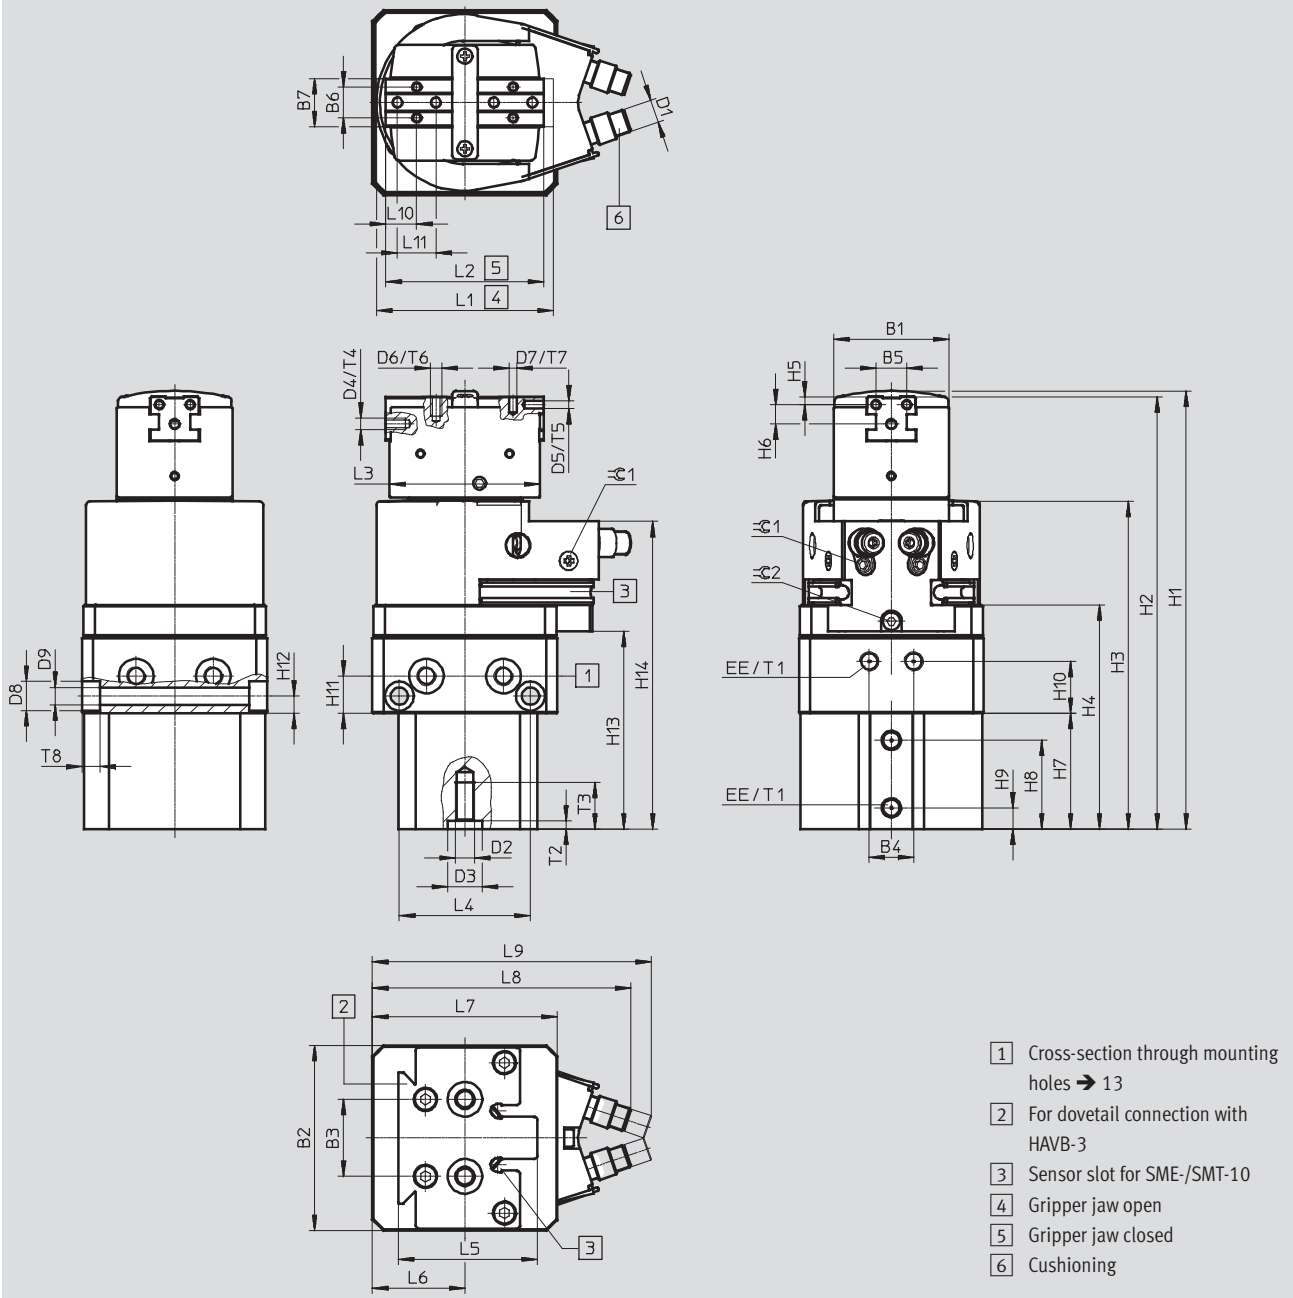

Swivel angle

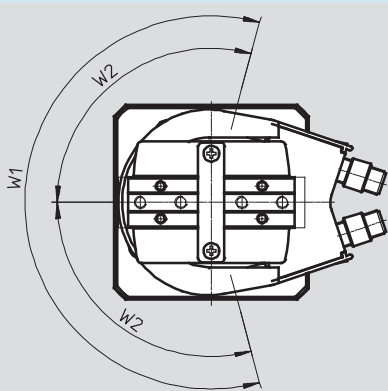


Swivel/gripper units HGDS-B


Technical data

Cross-section at 1 → 12


Size 12



Size 16

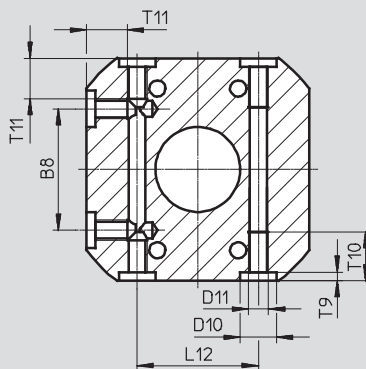

Size 20

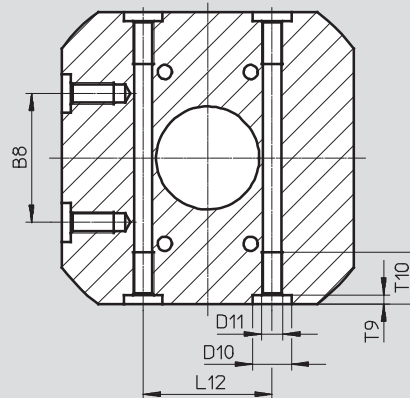

Size	B1	B2	B3	B4	B5	B6	B7	B8 ¹⁾	D1	D2	D3 Ø H7	D4
[mm]		±0.03	±0.02		±0.02	±0.02	±0.1					
12	30	48	20	11.5	8	8	12.5	20	M6x0.5	M5	9	M3
16	34	55	30	13	10	10	16	30	M8x1	M5	9	M3
20	40	68	30	16	12	12	20	30	M10x1	M5	9	M4

Size	D5 Ø H8	D6	D7 Ø H8	D8 Ø H13	D9 Ø H13	D10 Ø H7	D11	EE	H1	H2	H3	H4
[mm]									+1/-0.6	+0.8/-0.4	+1.3/-0.2	+0.8/-0.2
12	2	M3	2	7.5	4.5	9	M5	M5	113.4	111.9	85	58.2
16	2	M3	2	–	4.2	9	M5	M5	121.7	120.1	92.3	64.3
20	2.5	M4	2.5	–	4.2	9	M5	M5	154.8	152.8	112.3	81.7

Size	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14	L1	L2
[mm]	±0.02	±0.12	±0.1	±0.1			-0.1		+1/-0.2	+1/-0.2	±0.5	±0.5
12	2	5	30	23	7.5	13.5	9.7	4.5	51.3	79.8	46	41
16	3	5	34.5	26	6.3	14	8	–	58.2	86.7	58	49
20	3	7	43	34.6	5.3	19	9	–	73.1	105.6	78	64

Size	L3	L4	L5	L6	L7	L8 ±1 P	L9 ±1		L10	L11	L12 ¹⁾	T1
[mm]	±0.5	±0.1		±0.05	±0.03		P1	YSRT	±0.02			min.
12	39	34	36	24	48	67	72.4	72.4	8	10	20	5.3
16	47	–	40.5	27.5	55	80.2	81.6	81.6	8	10	30	5
20	61	–	40.5	34	68	93.3	97	97	12	14	30	6


Size	T2	T3	T4	T5	T6	T7	T8	T9	T10	T11	W1	W2	≈ 1	≈ 2
[mm]	+0.1		±0.4	max.	min.	max.		+0.1						
12	2.1	12.1	6	5	3.5	6	4.6	2.1	10	–	210°	105°	2	2
16	2.1	12.1	6	6	4.5	6	–	2.1	12.1	10	210°	105°	2.5	2.5
20	2.1	12.1	9	8	6	7.5	–	2.1	12.1	–	210°	105°	3	2.5

1) Tolerance for centring holes Ø9 H7,
tolerance for thread M5 ±0.1 mm

Swivel/gripper units HGDS-B

Technical data

FESTO

Ordering data			
	Size [mm]	Part No.	Type
	With cushioning P		
	12 ¹⁾	1187955	HGDS-PP-12-P-A-B
	16 ¹⁾	1187958	HGDS-PP-16-P-A-B
	20 ¹⁾	1187961	HGDS-PP-20-P-A-B
	With cushioning P1		
	12 ¹⁾	1187956	HGDS-PP-12-P1-A-B
	16 ¹⁾	1187959	HGDS-PP-16-P1-A-B
	20 ¹⁾	1187962	HGDS-PP-20-P1-A-B
	With cushioning YSRT		
	12 ¹⁾	1187957	HGDS-PP-12-YSRT-A-B
	16 ¹⁾	1187960	HGDS-PP-16-YSRT-A-B
	20 ¹⁾	1187963	HGDS-PP-20-YSRT-A-B

1) Two centring sleeves are included in the scope of delivery of the swivel/gripper unit.

Swivel/gripper units HGDS-B

Accessories






FESTO

Adapter kit
HMVA, HMSV

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant

Note

The kit includes the individual mounting interface as well as the necessary mounting material.




Permissible drive/gripper combinations with adapter kit					Download CAD Data → www.festo.com/us/cad		
Combination	Drive Size	Gripper Size	Mounting option		Adapter kit CRC ¹⁾	Part No.	Type
							
HMP/HGDS	HMP	HGDS			HAVB, HMSV		
	Direct mounting						
	16, 20, 25, 32	16, 20	–	■	2	534290	HMSV-38
	Dovetail mounting						
	16, 20, 25, 32	16, 20	–	■	2	163239	HAVB-3
						534290	HMSV-38
DGP..., DGE-..., DGEA/HGDS	DG...	HGDS			HMSV, HMVA		
	DGP...-25	12, 16, 20	■	■	2	177653	HMSV-7
	DGE-25					534290	HMSV-38
	DGEA-18					196788	HMVA-DLA18/25
	DGP...-40	12, 16, 20	■	■		177653	HMSV-7
	DGE-40					534290	HMSV-38
						196790	HMVA-DLA40
EGSA/HGDS	EGSA	HGDS			HMSV		
	60	16, 20	■	■	2	560019	HMSV-63
						534290	HMSV-38

1) Corrosion resistance class 2 according to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.


Swivel/gripper units HGDS-B

Accessories



FESTO



Ordering data					
	For size	Brief description	Part No.	Type	PU ¹⁾
Cushioning kit for P/P1/YSRT cushioning					
	12	P cushioning: – Flexible cushioning component	1731537	HGDS-12-P-B	1
	16		1731540	HGDS-16-P-B	
	20		1731544	HGDS-20-P-B	
	12	P1 cushioning: – Flexible cushioning component – Adjustable – With metal fixed stop	1731536	HGDS-12-P1-B	1
	16		1731539	HGDS-16-P1-B	
	20		1731542	HGDS-20-P1-B	
	12	YSRT cushioning: – Shock absorber – Self-adjusting – With metal fixed stop	1731538	HGDS-12-YSRT-B	1
	16		1731541	HGDS-16-YSRT-B	
	20		1731545	HGDS-20-YSRT-B	



1) Packaging unit

Ordering data			Technical data → Internet: zbh		
	For size	Weight [g]	Part No.	Type	PU ¹⁾
Centring sleeve ZBH					
	12, 16, 20	1	150927	ZBH-9	10

1) Packaging unit

Ordering data – Proximity sensors for C-slot, magneto-resistive					Technical data → Internet: smt	
	Type of mounting	Switching output	Electrical connection, connection direction	Cable length [m]	Part No.	Type
N/O contact						
	Insertable in the slot from above	PNP	Cable, 3-wire, in-line	2.5	551373	SMT-10M-PS-24V-E-2,5-L-OE
			Plug M8x1, 3-pin, in-line	0.3	551375	SMT-10M-PS-24V-E-0,3-L-M8D
	Insertable in the slot from above	PNP	Cable, 3-wire, lateral	2.5	551374	SMT-10M-PS-24V-E-2,5-Q-OE
			Plug M8x1, 3-pin, lateral	0.3	551376	SMT-10M-PS-24V-E-0,3-Q-M8D

Ordering data – Proximity sensors for C-slot, magnetic reed					Technical data → Internet: sme	
	Type of mounting	Switching output	Electrical connection, connection direction	Cable length [m]	Part No.	Type
N/O contact						
	Insertable in the slot from above	Contacting	Cable, 3-wire, in-line	2.5	551365	SME-10M-DS-24V-E-2,5-L-OE
			Cable, 2-wire, in-line	2.5	551369	SME-10M-ZS-24V-E-2,5-L-OE
			Plug M8x1, 3-pin, in-line	0.3	551367	SME-10M-DS-24V-E-0,3-L-M8D
	Insertable in the slot from above	Contacting	Cable, 3-wire, lateral	2.5	551366	SME-10M-DS-24V-E-2,5-Q-OE
			Cable, 2-wire, lateral	2.5	551370	SME-10M-ZS-24V-E-2,5-Q-OE
			Plug M8x1, 3-pin, lateral	0.3	551368	SME-10M-DS-24V-E-0,3-Q-M8D

Ordering data – Connecting cables				Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541 333	NEBU-M8G3-K-2.5-LE3
			5	541 334	NEBU-M8G3-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541 338	NEBU-M8W3-K-2.5-LE3
			5	541 341	NEBU-M8W3-K-5-LE3

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneapantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com